



Product Specification

Product Feature

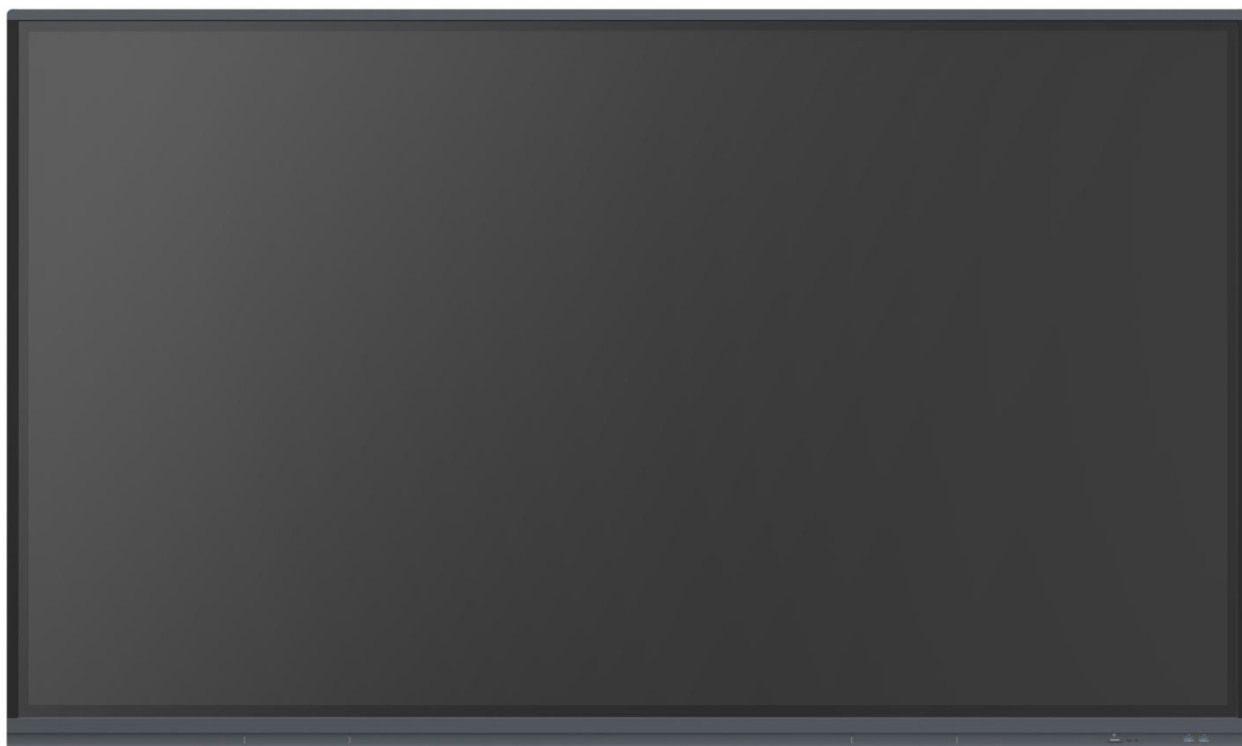

- ✧ Front 2 USB3.0 ports
- ✧ Front 1 physical key
- ✧ Bottom loudspeaker
- ✧ 4K Ultra HD display
- ✧ IR (Infrared Ray) touch technology
- ✧ Glass 3 mm, pencil 9H hardness
- ✧ Compatible with detachable OPS module & Wireless module
- ✧ Writing double colors with double pens simultaneously

Dimension

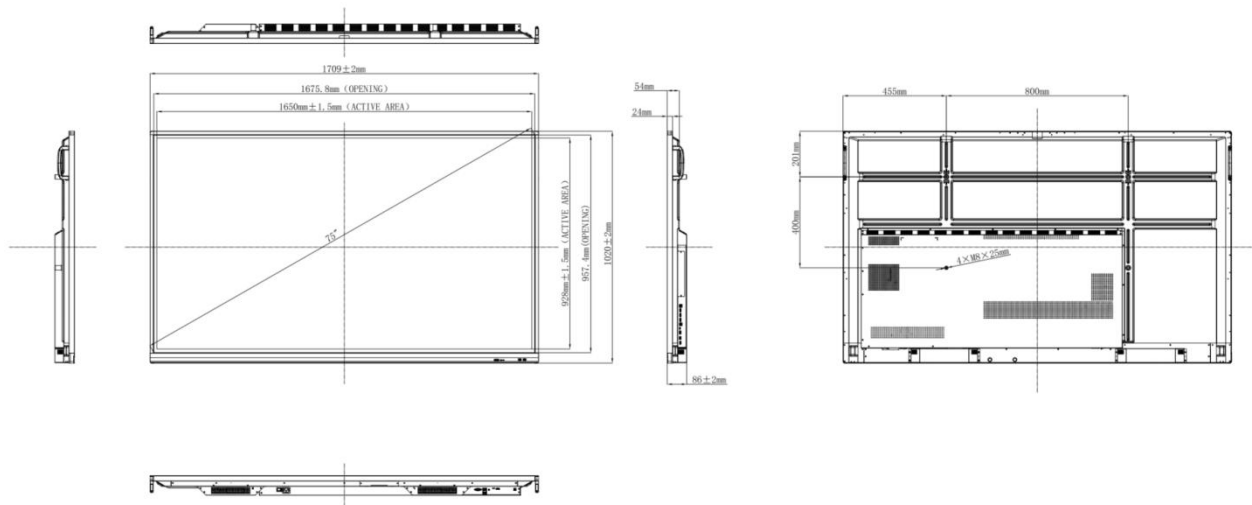

Display

Size	75 inch
Panel Type	ADS
Response Time	8ms
Aspect Ratio	16:9
Display Area	$1649.664(\text{H}) \times 927.936(\text{V})\text{mm}$
Pixel Pitch	$0.4296 \times 0.4296\text{mm}$
Resolution	$3840(\text{H}) \times 2160(\text{V})$
Refreshing Frequency	60Hz
Display Color	1.07B(10bit)
NTSC	72%
Contrast Ratio	1200:1
Viewing Angle	178° (H/V)
Back Light Unit	DLED

Brightness with glass(min)	300cd/m ²
Brightness with glass(typ)	350cd/m ²
Life Time	≥30000 Hours

Operating System

System Version	Android 11.0
RAM	4G/8G (optional)
ROM	32G/64G (optional)
CPU	A73 × 4+A53 × 4

Touch System

Sensing Type	Infrared recognition
Touch Tool	Passive infrared pen
Accuracy	± 1mm
Touch Point	Android: 32 points touch OPS: 40 points touch
Minimum object size	2mm
Writing Height	≤1mm
Interpolation Resolution	32768(W) × 32768(D)
Response Time	≤5ms
System	Windows10/Windows8/Windows7/Windows XP/Android/ Linux/Mac OS X/Chrome

Audio

Sound Channel	2.0
Speaker	2 × 20W
Sound pressure level	80dB
Peak power	54W

Power		
Power Requirements	100–240V~50/60Hz 4.5A	
Typical Power*[1]	245W	
Max Power*[2] (W/OPS)	455W	
Standby Power	≤0.5W	
I/O Port		
HDMI IN	3	Up to 4K@60Hz, HDCP 2.1, CEC,ARC (HDMI 1)
HDMI OUT	1	Up to 4K@60Hz
USB 2.0	1	For system upgrades
USB 3.0	4	Front × 2, Rear × 2 All USB 3.0 can auto switch to current channel
USB Type–C	1	Video,Audio,Touch,PD 65W, LAN Network Sharing
TOUCH 2.0	2	2.0
AUDIO OUT	1	3.5mm Phone Jack
SPDIF	1	PCM output format
RS232	1	Baud rate 9600
RJ45 IN	1	10M/100M/1000Mbps
RJ45 OUT	1	10M/100M/1000Mbps
TF Card	1	Support MAX: 128GB
Physical Specifications		
Dimension L × H × D	1709 × 1020 × 86mm	
Dimension (package) L × W × H	1863 × 225 × 1140mm	
Thickness of machine and wall mount	116mm(WIB9060G)	
Wall–hanging Screw Spec	M8 × 25mm	

VESA	800 × 400mm
Net Weight	49.50kg
Gross Weight	63.85kg

Accessories

Power Cord	× 1
HDMI Cable	× 1
USB Touch Cable (Type A–B)	× 1
Remote Control	× 1
Writing Pen	× 2

Environmental Conditions

Operation Temperature	0℃~40℃
Operation Humidity	10%~90%RH
Storage Temperature	–20℃~60℃
Storage Humidity	10%~90%RH
Altitude	Below 5000 meters

Optional Module

PC Module	OPS62A/OPS42A
Wireless Module	SI07B

Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product.

The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product.

The description, illustrations, etc. in this document may subject to change in accordance with the latest product specification and performance.

Should the above–mentioned change in the document become necessary, the document may be updated without written notice.

Notes:

*[1]: Without OPS, after the user menu is restored to the factory setting, it starts up without any setting and the port is not loaded.

*[2]: With OPS, OPS plays the color bar signal and runs the burning test.

Port full load, user menu: Volume 100%, backlight 100%, brightness contrast 100%.